

# INSTALLATION MANUAL

# 45955

## Level of Difficulty

Easy

## Weight Capacity

Gross trailer weight (GTW)	20,000 lbs.
Tongue weight (TW)	2,000 lbs.

## Parts List

Item	Qty	Description
1	1	Adjustable shank
2	1	Dual ball accessory
3	2	Pin
4	1	Clip

Hitch pin and clip sold separately

## Tools Required

None

## Maintenance

Mild automotive detergent may be used to clean the product. Do not use dish detergent, abrasive cleaners, abrasive pads, wire brushes or other similar products that may damage the finish.

Apply grease to the zerk located on the back of the shank assembly prior to each use to ensure quiet and trouble-free operation.



## ⚠ DANGER

Cannot be used in the rise position.

## ⚠ WARNING

Never exceed the vehicle manufacturer's recommended towing capacity. The ratings of the mount system are intended to represent the capability of the product and in no way reflect the ratings or capacity of the towing system it is being used with. The consumer or operator are strongly advised to learn the ratings of the various components of the towing system and never exceed the limits of the lowest rated component being used.

Use of any pin other than that of the mount system manufacturer could be a serious safety hazard and will void the warranty.

Check for proper clearance of the trailer coupler to the tongue of the Rebellion™ XD when latched on the ball. Some couplers may require a 1" rise ball to add clearance for maneuvering.

Never hook up trailer safety chains to the mount system. Ensure the safety chains operate freely around the mount system and do not become entangled.

## Product Photo



## NOTICE

Visit [www.curtmfg.com](http://www.curtmfg.com) for a full-color copy of this instruction manual, as well as helpful videos, guides and much more!

Before you begin installation, read all instructions thoroughly.

Prior to towing, ensure all fasteners are tight and all structural components are sound. Using a torque wrench and 3/8" hex drive socket, torque hardware to 45-55 lb-ft.


## Product Registration

CURT stands behind our products with industry-leading warranties. To get copies of the product warranties, register your purchase or provide feedback, visit: [warranty.curtgroup.com/surveys](http://warranty.curtgroup.com/surveys)

# ASSEMBLY & SETUP

## Parts List

Item	Qty	Description
1	1	Adjustable shank
2	1	Dual ball accessory
3	2	Pin
4	1	Clip

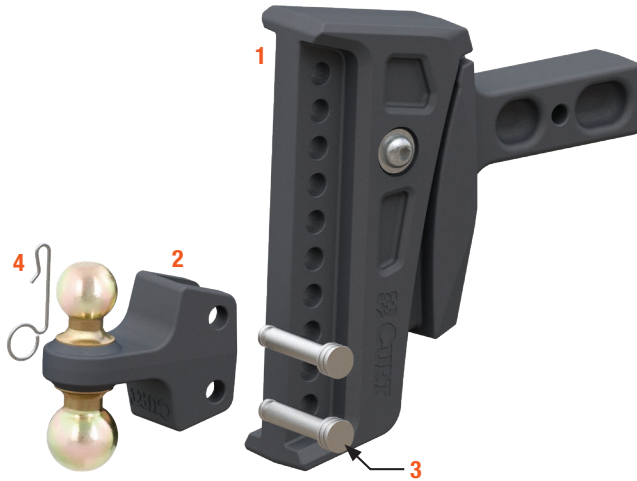

Hitch pin and clip sold separately

## Before you Begin

The Rebellion™ XD has a built-in anti-rattle feature located in the dual ball mount channel to keep your towing system quiet.

See the recommended assembly instructions for optimal performance.




## Step 1 - Insert into the Trailer Hitch

Begin by installing the shank (#1) into the trailer hitch receiver and secure it with a hitch pin and clip (sold separately).

## Step 2 - Determine Required Ball Height

Determine the proper ball height by leveling the trailer and measuring from the bottom of the trailer tongue to the ground, see below.

Find the hole closest to that measurement on the adjustable shank (#1). The trailer ball platform (#2) will be centered on that hole.

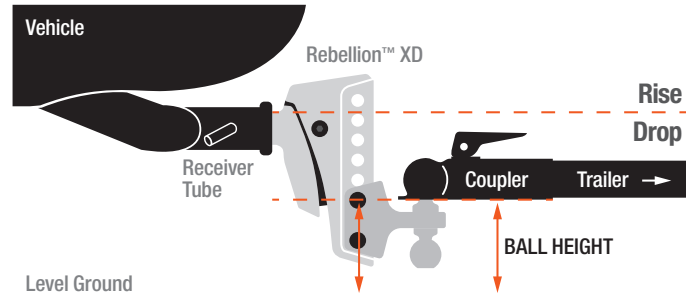

## Step 3 - Attach the Dual Ball

Based on the determined ball height, slide the dual ball mount onto the shank and align with the proper hole locations.

Angle the dual ball slightly upwards and press in toward the shank. Insert a pin (#3) into the top tongue hole first. To pin the bottom mount hole, apply downward force to the mount, and slide the second pin into place.

**Note:** The highest mounting position will require the bottom pin to be installed first with the mount angled downward. Then, apply force upwards to install the second pin.

Secure the pins with the included clip as shown below (#4).

**Note:** The clip can be installed in both up or down orientations.

### ⚠ WARNING

The provided pins are specifically engineered for this system. If replacement pins are needed, they must be replaced with original factory mount pins (CURT# 45959).

